

Submittal Data: System 9C1 ASU9C1 & AOU9C1



Fujitsu General America, Inc.

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling	9,400 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	11.0

Indoor Unit:

Power Supply	115V
Noise Level db (A)- H-M-L-Q	40 / 37 / 34 / 32
Weight	20 lbs.

Outdoor Unit:

Power Supply	115V
Max Fuse Size	15A
Min. Ampacity	12A
Running Current	9.0A
Weight	64 lbs.


Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Louver Function
- ◆ Built in Low Ambient to 32 F
- ◆ Auto Restart / Reset
- ◆ Programmable Timer

OUTLINE AND DIMENSIONS

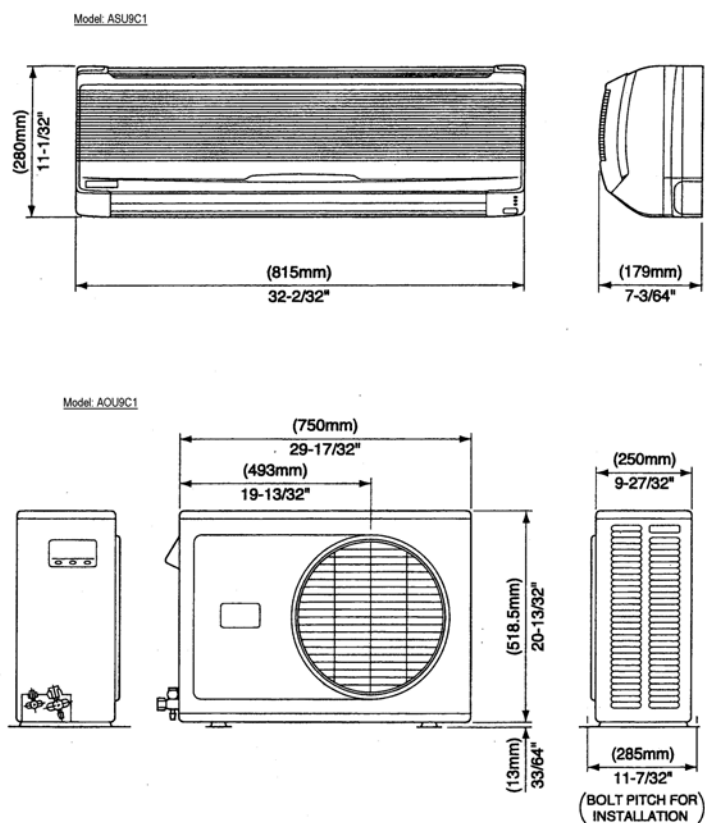

Notes:

Submittal Data: System 12C1 ASU12C1 & AOU 12C1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	12,200 BTU/h
Outdoor Design Temperature °F DB/WB	95/75
SEER	11.0

Indoor Unit:

Power Supply	115V
Noise Level db (A) - H/ M/ L/ Q	41 / 39 / 37 / 35
Weight	20 lbs.

Outdoor Unit:

Power Supply	115V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current	11.0A
Weight	75 lbs.


Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Louver Function
- ◆ Built in Low Ambient to 32°F
- ◆ Auto Restart / Reset
- ◆ Programmable Timer

OUTLINE AND DIMENSIONS

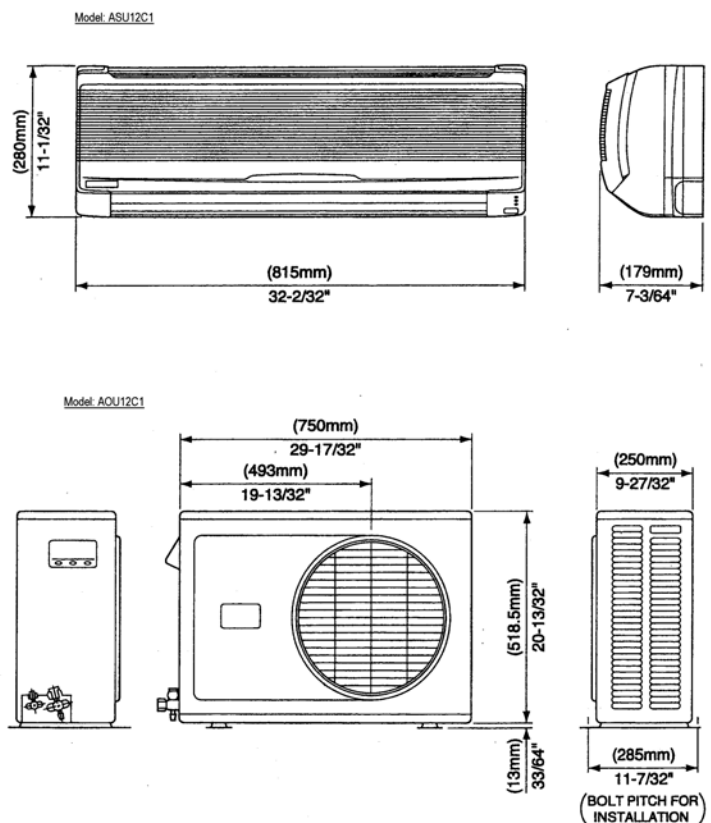

Notes:

Submittal Data: System 18C1 ASU18C1 & AOU18C1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	18,000/17,000 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	11.0

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	42 / 38 / 34
Weight	40 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current	7.6/8.2A
Weight	145 lbs.


Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	65 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver Function
- ◆ Built in Low Ambient to 32° F
- ◆ Auto Restart/ Re-set
- ◆ Programmable Timer

OUTLINE AND DIMENSIONS

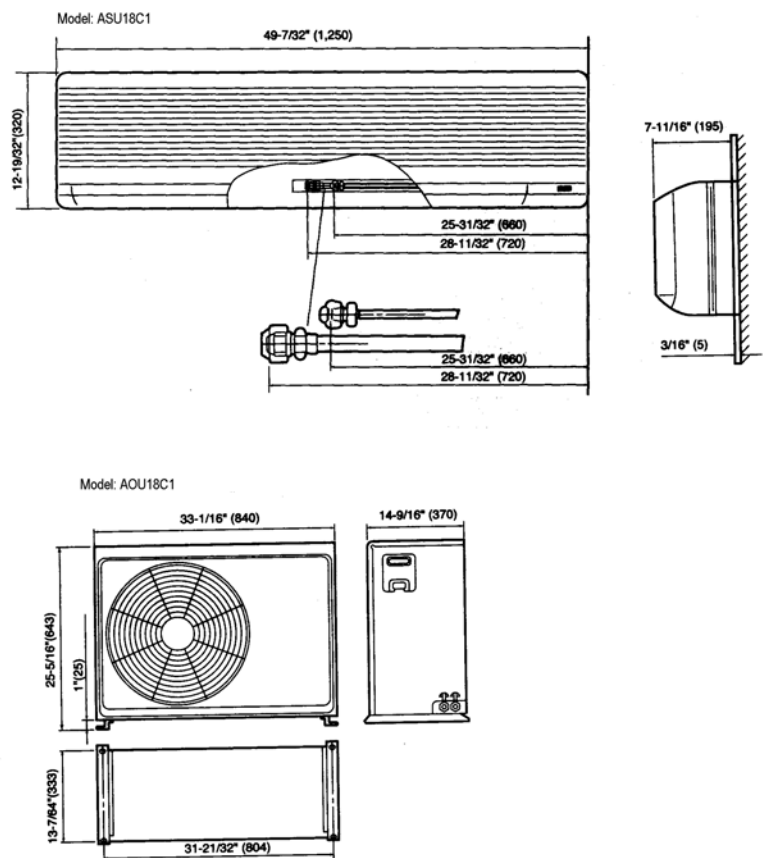

Notes:

Submittal Data: System 24C1 ASU24C1 & AOU24C1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	23,000/22,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	48 / 46 / 42
Weight	40 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current	10.0/10.8A
Weight	147 lbs.


Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	65 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Restart/ Re-set
- ◆ 4 Way Auto Louver Function
- ◆ Built in Low Ambient to 32° F
- ◆ Programmable Timer

OUTLINE AND DIMENSIONS

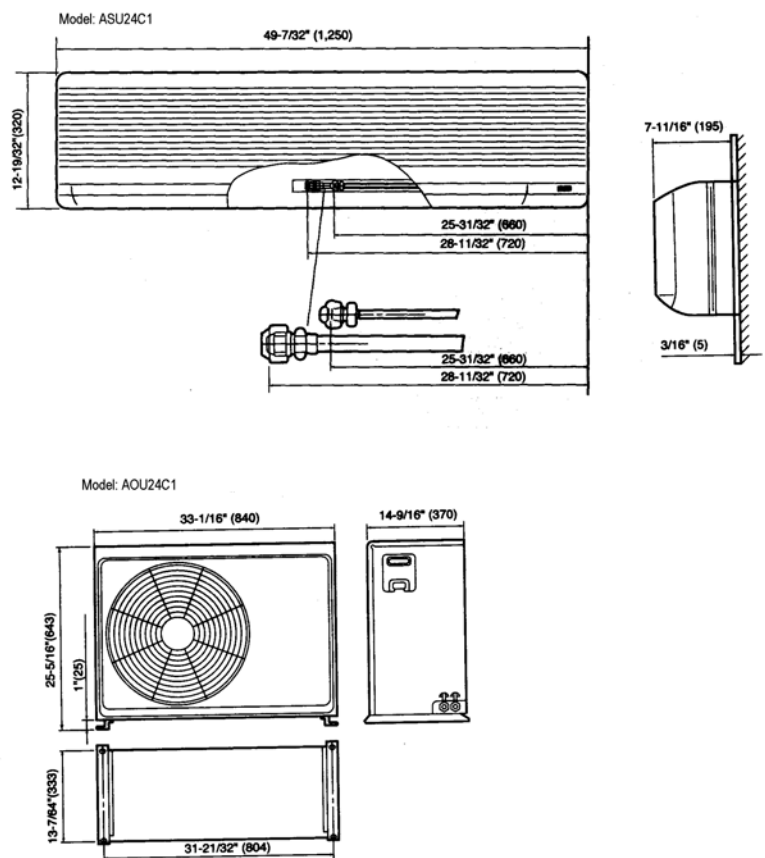

Notes:

Submittal Data: System 30C1 ASU30C1 & AOU30C1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	29,500/28,700 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	10.0

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	48 / 46 / 42
Weight	40 lbs.

Outdoor Unit:



Power Supply	230 / 208 V
Max Fuse Size	30A
Min. Ampacity	20A
Running Current	15 / 16A
Weight	207 lbs.

Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Length	98 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	3/4 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver Function
- ◆ Built in Low Ambient to 32° F
- ◆ Auto Restart/ Re-set
- ◆ Programmable Timer

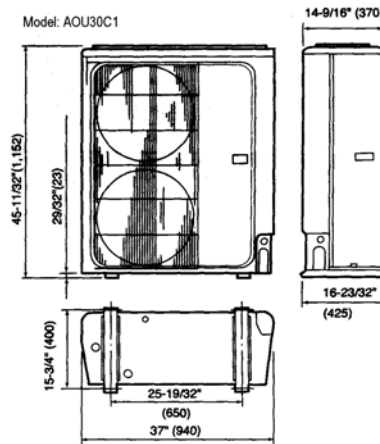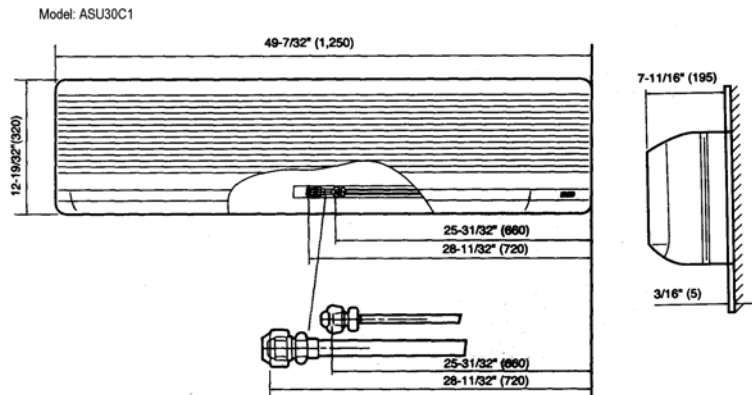

Notes:

Submittal Data: System 36CS ABU36 & AOU36



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.:	Model No.:

Capacities:

Cooling	36,500/35,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	10.0

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	51 / 49 / 45
Weight	106 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	30A
Min. Ampacity	20A
Running Current	15/16A
Weight	223 lbs.

Refrigerant Piping:

Max Ht. Difference	99 ft.
Max Length	164 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	3/4 in.


Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Restart/ Re-set


Notes:

OUTLINE AND DIMENSIONS

Model: **ABU36**

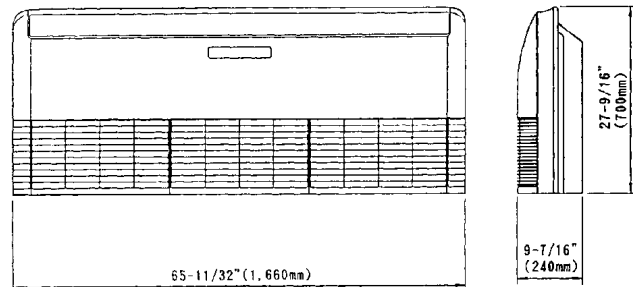

Model: **AOU36**

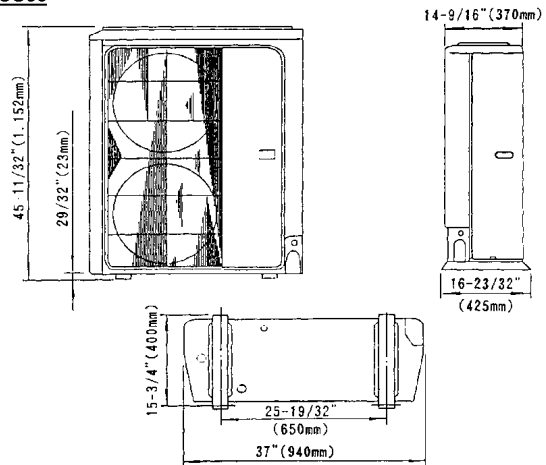

Submittal Data: System 9R1 ASU 9R1 & AOU 9R1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.:	Model No.:

Capacities:

Cooling	9,200 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	10,800 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	115 V
Noise Level db(A) - H-M-L-Q	40 / 37 / 34 / 32
Weight	20 lbs.

Outdoor Unit:

Power Supply	115 V
Max Fuse Size	15A
Min. Ampacity	12A
Running Current Cooling	8.8A
Running Current Heating	7.8A
Weight	66 lbs.

Refrigerant Piping:


Max Ht. Difference	26 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Louver Function
- ◆ Auto Change Over
- ◆ Auto Restart / Reset
- ◆ Power Diffuser

Notes:

OUTLINE AND DIMENSIONS

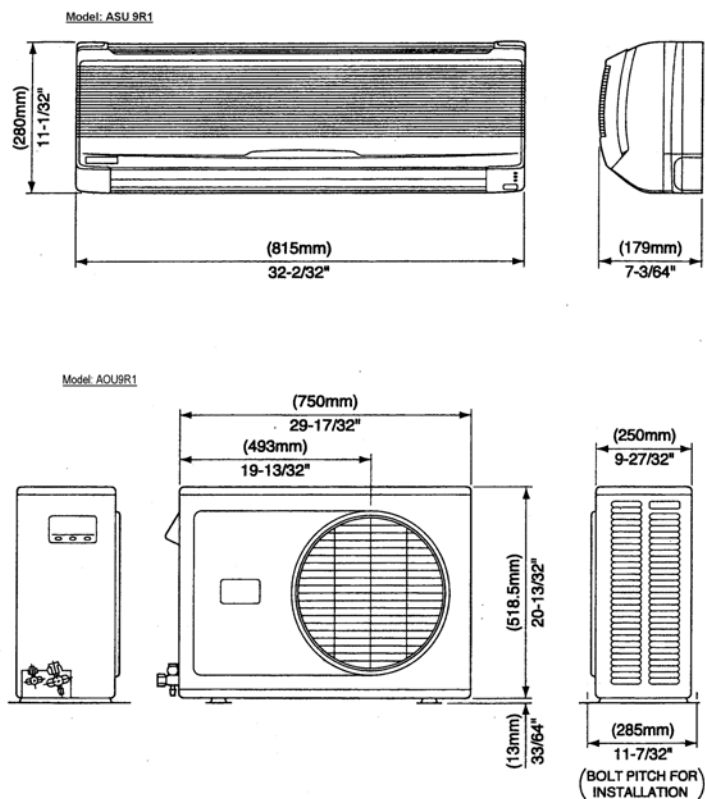

Submittal Data: System 12R1 ASU 12R1 & AOU 12R1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	11,600 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	13,700 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	115 V
Noise Level db(A) - H-M-L-Q	41 / 39 / 37 / 35
Weight	20 lbs.

Outdoor Unit:

Power Supply	115 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	11.0A
Running Current Heating	10.7A
Weight	77 lbs.

Refrigerant Piping:


Max Ht. Difference	26 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Louver Function
- ◆ Auto Change Over
- ◆ Auto Restart / Reset
- ◆ Power Diffuser

Notes:

OUTLINE AND DIMENSIONS

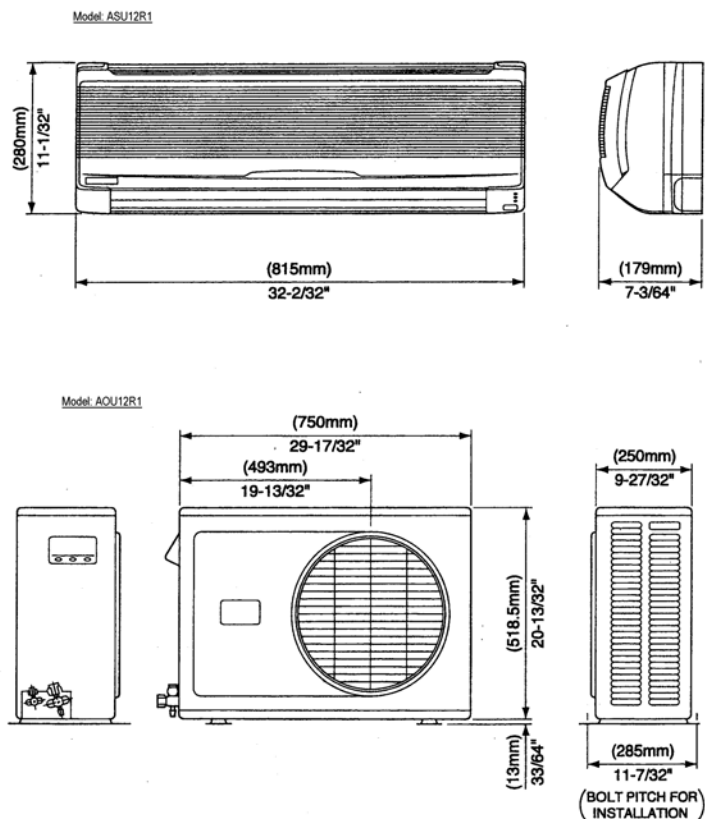

Submittal Data: System 18R1 ASU18R1 & AOU18R1



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	17,000/16,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	18,000/17,500 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	42 / 38 / 34
Weight	40 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	7.8/8.5A
Running Current Heating	7.2/7.5A
Weight	147 lbs.



Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	65 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Power Diffuser

OUTLINE AND DIMENSIONS

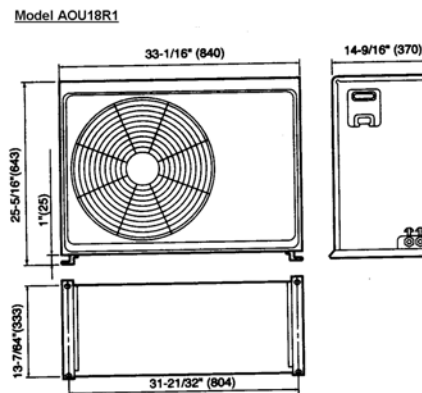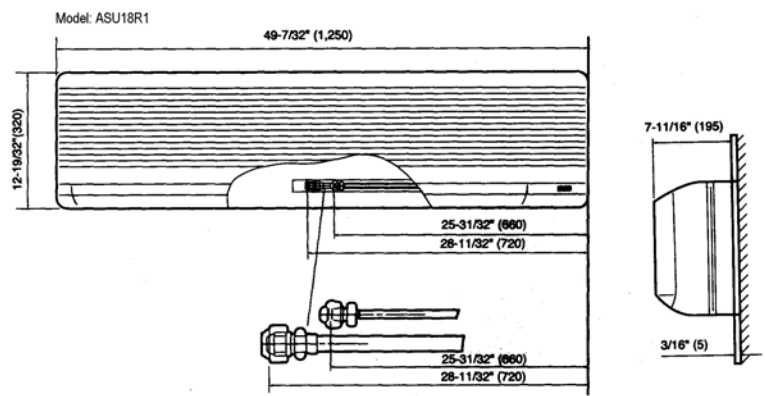

Notes:

**Submittal Data: System 24R1
ASU24R1 & AOU24R1**

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling	23,000/22,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	23,500/22,500 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	48 / 46 / 42
Weight	40 lbs.



Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	9.9/10.7 A
Running Current Heating	8.9/9.7 A
Weight	150 lbs.

Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length	65 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

OUTLINE AND DIMENSIONS

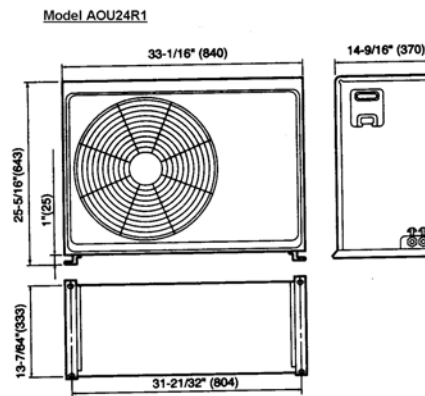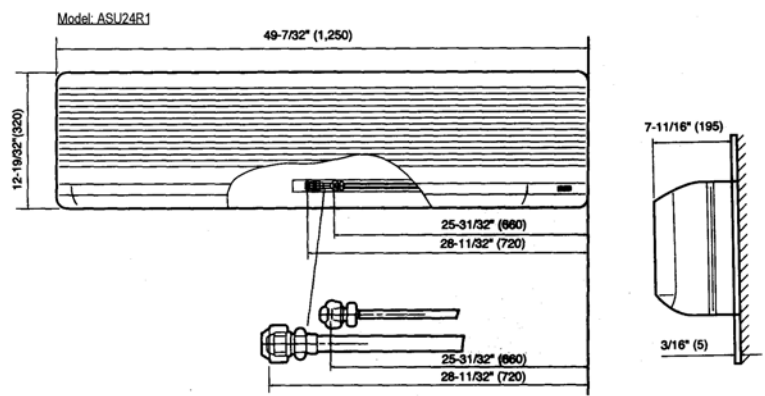

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Power Diffuser

Notes:



Fujitsu General America, Inc.

Submittal Data: ABU 22 & AOU 22

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling	21,000/20,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
SEER	10.0

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	49 / 45 / 41
Weight	66 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current	9.6/10.4A
Weight	147 lbs.

Refrigerant Piping:

Max Ht. Difference	36 ft.
Max Length	85 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.


Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ Auto Restart/ Re-set


Notes:

OUTLINE AND DIMENSIONS

Model: ABU22

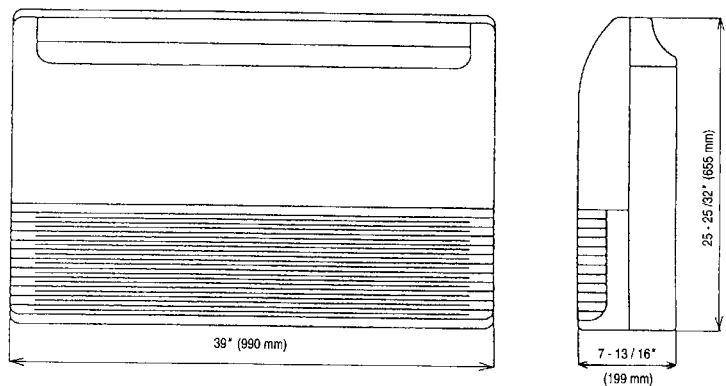

Model: AOU22

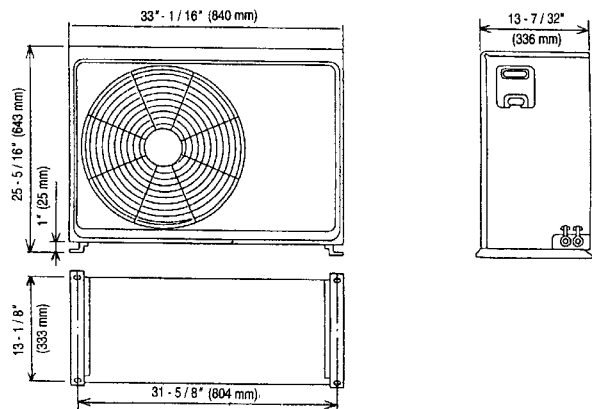

Submittal Data: System 18CD ASU9D & AOU18D



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling Each Unit	9,600/9,300 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L / Q	40 / 38 / 36 / 33
Weight	22 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	4.6/4.9A
Weight	143 lbs.

Refrigerant Piping:


Max Ht. Difference	25 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

OUTLINE AND DIMENSIONS


Models : ASU9D / AOU18D

Unit : inch (mm)

INDOOR UNIT

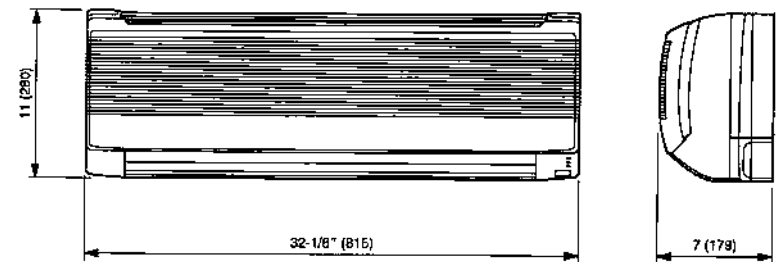

OUTDOOR UNIT

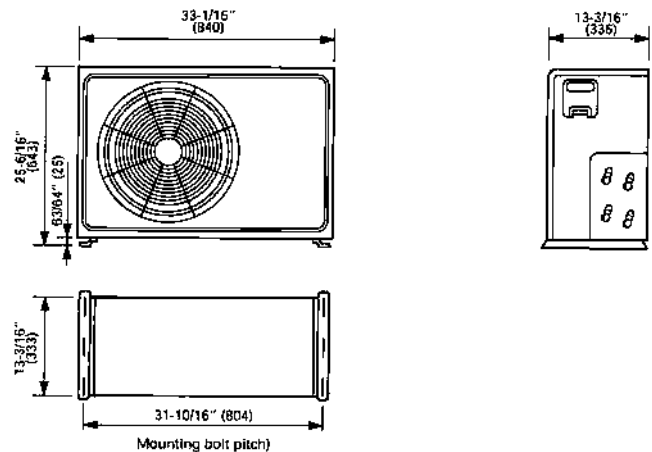

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 2 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Power Diffuser
- ◆ 4 Fan Speeds

Notes:

Submittal Data: System 18RD ASU9RD & AOU18RD



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.:	Model No.:

Capacities:

Cooling Each Unit	9,600/9,300 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	10,700/10,300 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L / Q	40 / 38 / 36 / 33
Weight	22 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	4.6/4.9A
Running Current Heating	4.4/4.6A
Weight	150 lbs.

Refrigerant Piping:

Max Ht. Difference	25 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

Standard Features:


- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 2 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Power Diffuser

OUTLINE AND DIMENSIONS


Models : ASU9RD / AOU18RD

Unit : inch (mm)

INDOOR UNIT

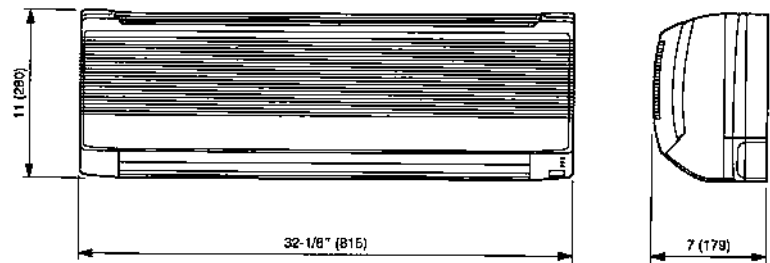

OUTDOOR UNIT

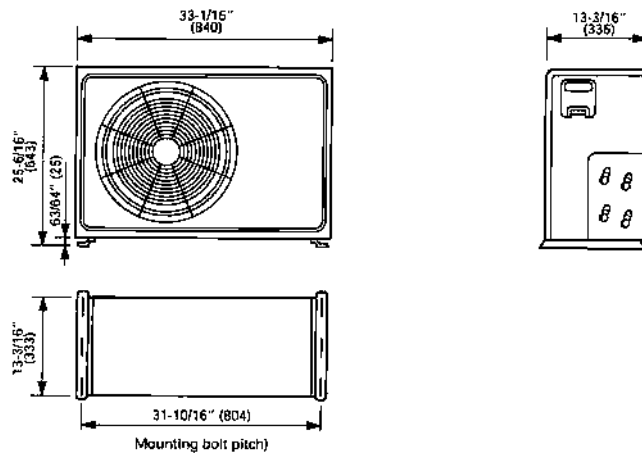

Notes:

Submittal Data: System 24CD1 ASU12D1 x 2 & AOU24D1



Fujitsu General America, Inc.

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling Each Unit	11,500 / 11,300
Outdoor Design Temperature	F° DB/WB 95/75

SEER	10.5
------	------

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L / Q	41 / 39 / 37 / 35
Weight	22 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	25A
Min. Ampacity	20A
Running Current Cooling	5.8 / 6.3A
Weight	146 lbs.

Refrigerant Piping:


Max Ht. Difference	25 ft.
Max Length	49 ft.
Liquid (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

OUTLINE AND DIMENSIONS

Model: ASU12D1 x 2


Unit : inch (mm)

INDOOR UNIT

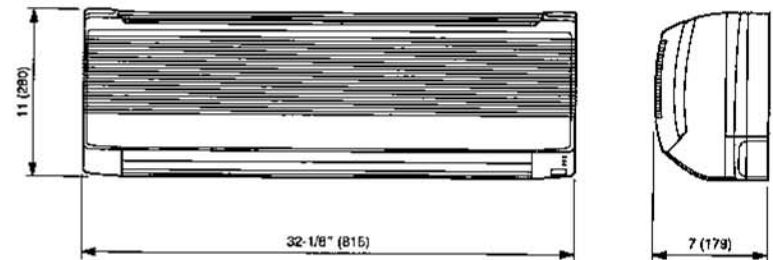

Model: AOU24D1

OUTDOOR UNIT

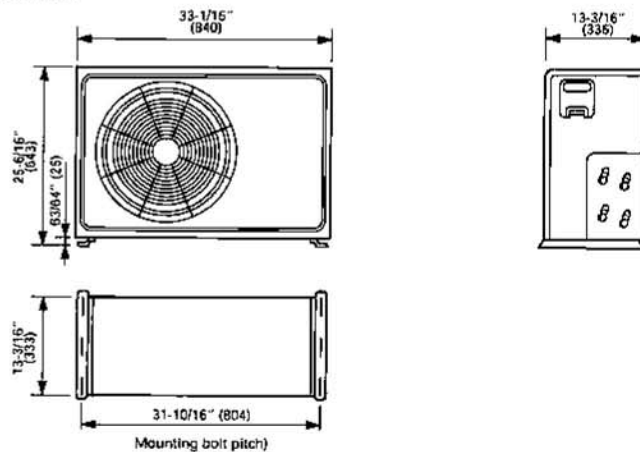

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 2 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Power Diffuser
- ◆ 4 Fan Speeds

Notes:

Submittal Data: System 36CT

ASU9T x 2 / ASU18T & AOU36T



Fujitsu General America, Inc.

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling Each Unit	A & B	9,000/ 8,750 BTU/h
	Unit C	18,000/17,500 BTU/h
Outdoor Design Temperature	F° DB/WB	95/75

SEER 11.0

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L / Q	42 / 40 / 38 / 35
Unit C	43 / 40 / 37
Weight Unit A / B	22 lbs.
Unit C	40 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	25A
Min. Ampacity	20A
Running Current (A) Unit A,B - C	8.0/8.3 - 9.3/9.8
Weight	220 lbs.

Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Length Unit A-B / C	49 ft. / 65 ft.
Liquid (O.D.) Unit A-B-C	1/4"
Suction (O.D.) Unit A-B-C	1/2"


Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control


OUTLINE AND DIMENSIONS

Models : ASU9T x 2 Unit A / B


INDOOR UNIT

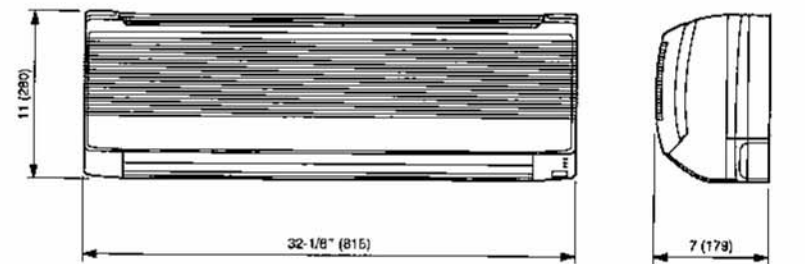

Model: ASU18T - Unit C

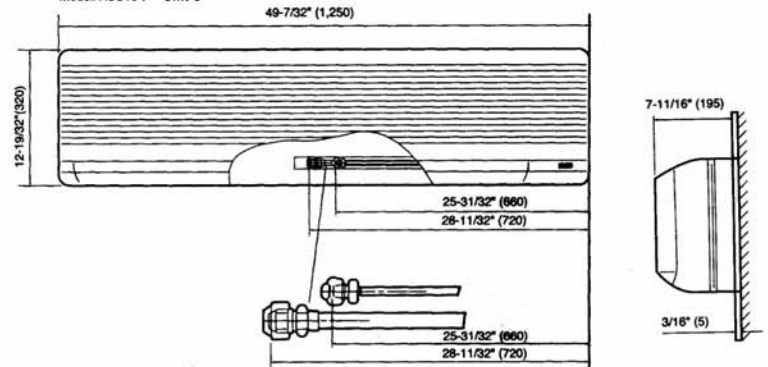

Model: AOU36T

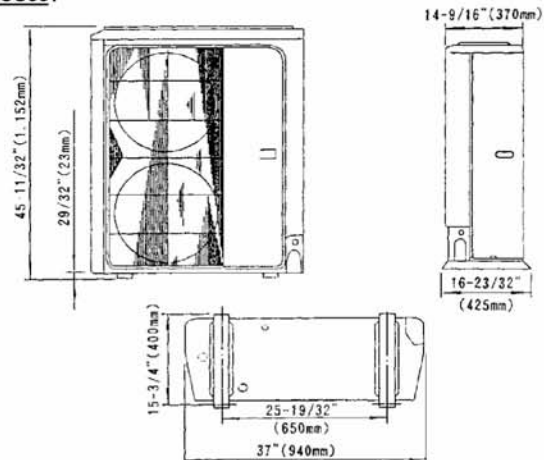

Notes:

Submittal Data: System 18RC AUU18RC & AOU18RC



Fujitsu General America, Inc.

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling	18,000/17,000 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	18,500/18,000 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:


Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	41 / 37 / 35
Weight	75 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	8.5/9.0 A
Running Current Heating	7.7/8.1 A
Weight	147 lbs.


Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Length	82 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

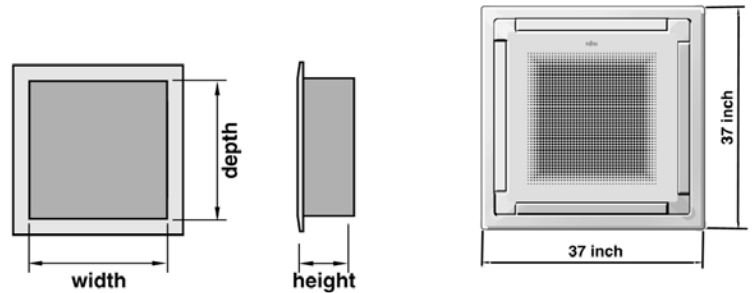

(inch)

	New model
height	9-1/4
width	33
depth	33

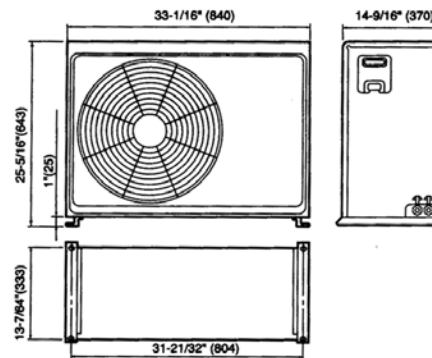

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital hard wired remote control
- ◆ Weekly timer
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Built in condensate pump to 31 inches

Notes:

Submittal Data: System 24RC AUU24RC & AOU24RC



Fujitsu General America, Inc.

Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

Capacities:

Cooling	23,000/22,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	24,000/23,000 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:


Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	44 / 42 / 39
Weight	75 lbs.

Outdoor Unit:

Power Supply	230 / 208 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current Cooling	10.5/11.2 A
Running Current Heating	9.5/10.2 A
Weight	150 lbs.


Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Length	82 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

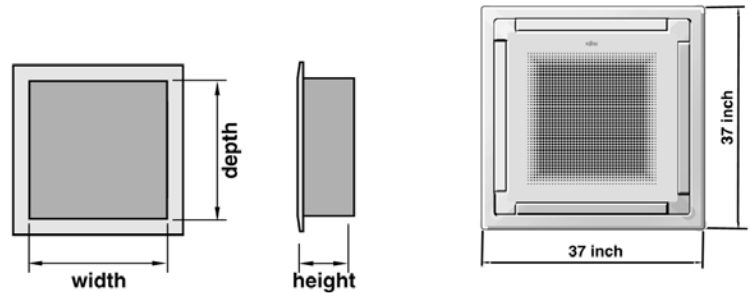

(inch)

	New model
height	9-1/4
width	33
depth	33

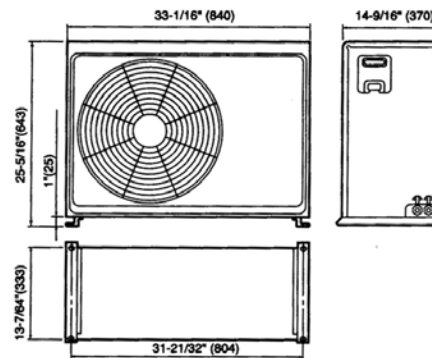

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital hard wired remote control
- ◆ Weekly timer
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Built in condensate pump to 31 inches

Notes:

Submittal Data: System 36RC AUU36RC & AOU36RC



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	36,000/35,500 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	43,000/42,000 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	50 / 48 / 45
Weight	88 lbs.

Outdoor Unit:


Power Supply	230 / 208 V
Max Fuse Size	35A
Min. Ampacity	30A
Running Current Cooling	16.0/17.0 A
Running Current Heating	18.0/19.5 A
Weight	220 lbs.

Refrigerant Piping:

Max Ht. Difference	164 ft.
Max Length	99 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	3/4 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital hard wired remote control
- ◆ Weekly timer
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Built in condensate pump to 31 inches

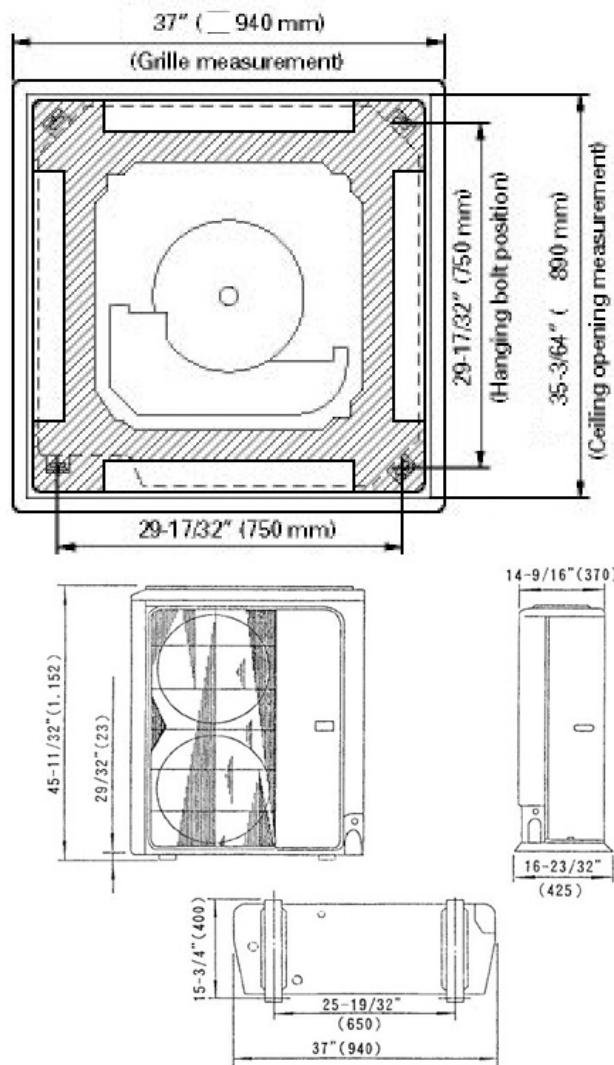

Notes:

Submittal Data: System 42RC AUU42RC & AOU42RC



Fujitsu General America, Inc.

Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule No.	Model No.:

Capacities:

Cooling	42,000/40,000 BTU/h
Outdoor Design Temperature	F° DB/WB 95/75
Heating	48,000/46,000 BTU/h
Outdoor Design Temperature	F° DB/WB 47/43
SEER	10.5

Indoor Unit:

Power Supply	230 / 208 V
Noise Level db(A) - H / M / L	50.5 / 48.5 / 46
Weight	88 lbs.

Outdoor Unit:


Power Supply	230 / 208 V
Max Fuse Size	40A
Min. Ampacity	35A
Running Current Cooling	19.5/21.0 A
Running Current Heating	21.0/23.0 A
Weight	243 lbs.

Refrigerant Piping:

Max Ht. Difference	164 ft.
Max Length	99 ft.
Liquid (O.D.)	3/8 in.
Suction (O.D.)	3/4 in.

Standard Features:

- ◆ Five year compressor warranty
- ◆ One year parts warranty
- ◆ Digital hard wired remote control
- ◆ Weekly timer
- ◆ 4 Way Auto Louver
- ◆ Auto Restart/ Re-set
- ◆ Auto Change Over
- ◆ Built in condensate pump to 31 inches

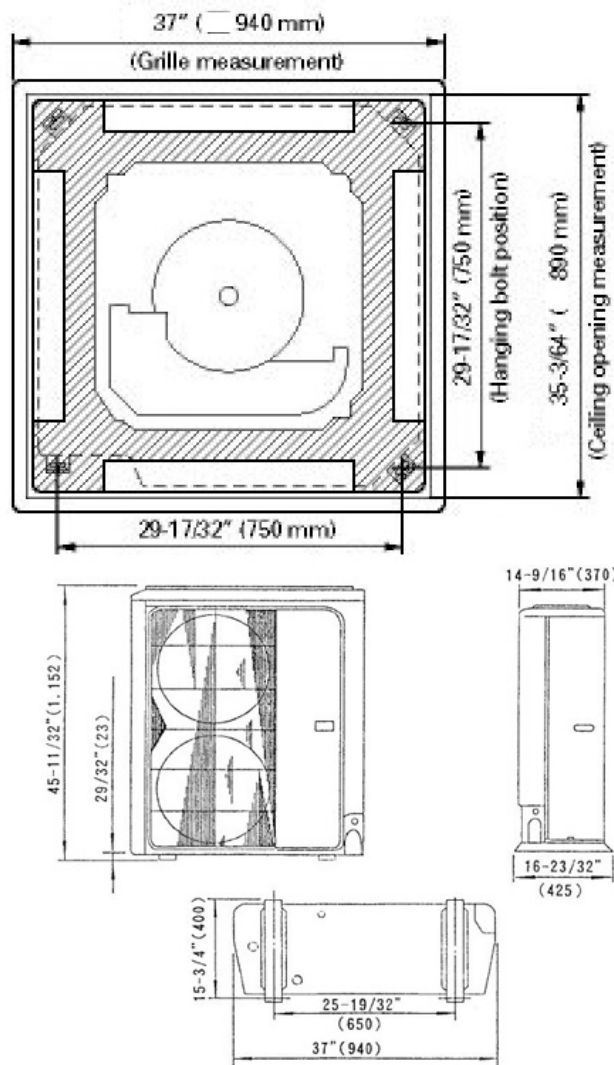

Notes: