

Commercial Series



AIR DIFFUSERS

Breezaer™

Global leaders in natural climate control solutions.™


Breezair® Commercial Series Air Diffuser

Technical Specifications

All Plenums are vacuum formed from high strength, low weight ABS plastic. The diffuser consists of aluminum airfoil blades, individually adjustable from fully open to closed for maximum directional air control


SPR0511001

Num. Outlets	Free Area FT ²	Velocity FPM	Volume CFM	Pressure IWG	Throw Feet
4	5.6	980	5500	0.14	16.5
		1278	7200	0.2	19.5
		1476	8200	0.3	23

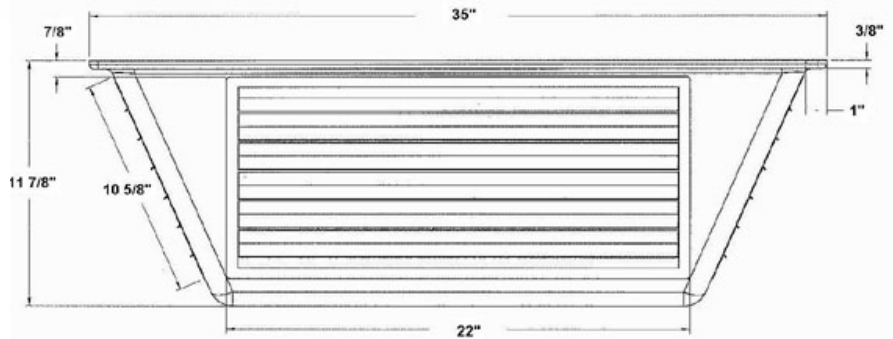

SPR0505002

Num. Outlets	Free Area FT ²	Velocity FPM	Volume CFM	Pressure IWG	Throw Feet
8	7	980	6990	0.14	16.5
		1278	9090	0.2	19.5
		1476	10488	0.3	23

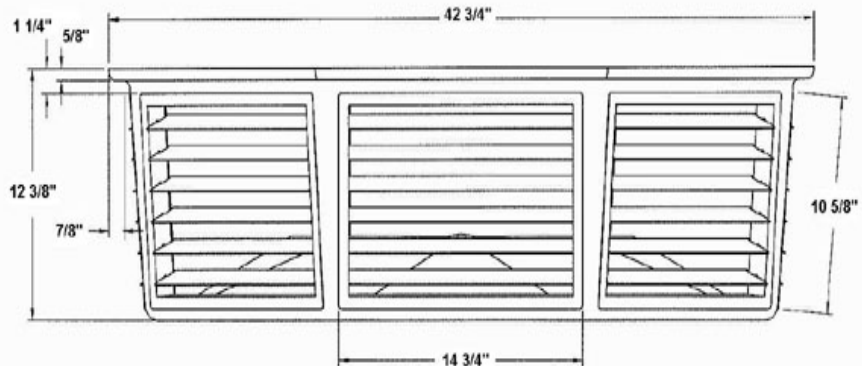

Seeley International (Americas)
 1202 North 54th Avenue
 Building 2, Suite 117
 Phoenix, AZ 85043 USA
 602-353-8066
www.breezaircooler.com

Our Company has a policy of continuous product development and therefore reserves the right to make changes to these specifications without notice. Breezair Chilled, and Seelectric are trademarks, and SensorTouch is a registered trademark of Seeley International. © Copyright 2008 Seeley International. January 2008

